

TOWELRADS INDEPENDENT



The Independent range is a timeless classic which comes in a variety of widths & heights to suit all room sizes. With a reflective chrome finish to match taps & fittings, or white finish to keep a minimalist feel you can decide which colour best suits your interior. This towel rail is also dual fuel compatible, which gives you greater heating flexibility – particularly in summer for drying damp towels.

Safety tested at **13 bar pressure**.

Normal household pressure is well **under 5 bar**.



Manufacturers
Warranty



Works with both central heating
and electric fuel sources



Available in Chrome
and White

FEATURES AND BENEFITS

- Classic ladder style towel rail in ever-popular White RAL 9016 finish or stylish Chrome.
- Range includes all popular sizes.
- This product can also be fitted with an electric dual fuel element.

INDEPENDENT CHROME

Height (mm)	Length (mm)	Pipe Centres (mm)	Product Code	Output at $\Delta T50k$	
				Watts	BTU
800	400	355	I30037	192	655
	500	455	I30043	227	774
	600	555	I30049	263	897
1000	400	355	I30038	238	812
	500	455	I30044	283	965
	600	555	I30050	329	1122
1200	400	355	I30039	283	965
	500	455	I30045	341	1163
	600	555	I30051	398	1358
1400	400	355	I30040	329	1122
	500	455	I30046	400	1365
	600	555	I30052	471	1607
1600	400	355	I30041	376	1282
	500	455	I30047	462	1576
	600	555	I30053	547	1866
1800	400	355	I30042	424	1446
	500	455	I30048	526	1795
	600	555	I30054	628	2143


INDEPENDENT WHITE

Height	Length	Pipe Centres (mm)	Product Code	Output at $\Delta T50k$	
				Watts	BTU
800	400	355	I30001	297	1013
	500	455	I30007	359	1224
	600	555	I30013	424	1447
1000	400	355	I30002	359	1225
	500	455	I30008	429	1464
	600	555	I30014	500	1706
1200	400	355	I30003	424	1447
	500	455	I30009	509	1737
	600	555	I30015	594	2027
1400	400	355	I30004	494	1685
	500	455	I30010	594	2027
	600	555	I30016	694	2368
1600	400	355	I30005	570	1945
	500	455	I30011	685	2337
	600	555	I30017	800	2730
1800	400	355	I30006	651	2221
	500	455	I30012	782	2668
	600	555	I30018	913	3115


TECHNICAL DIAGRAMS

INDEPENDENT COLLECTION





800x400MM
CONFIGURATION

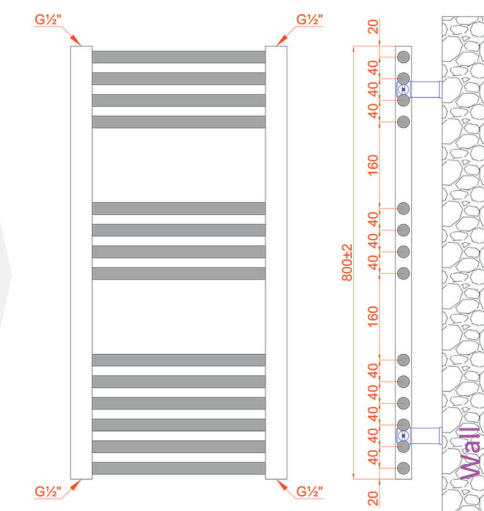

800x500MM
CONFIGURATION

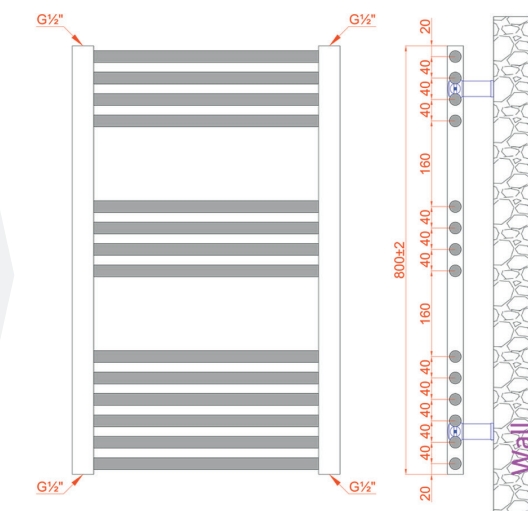



800x600MM
CONFIGURATION

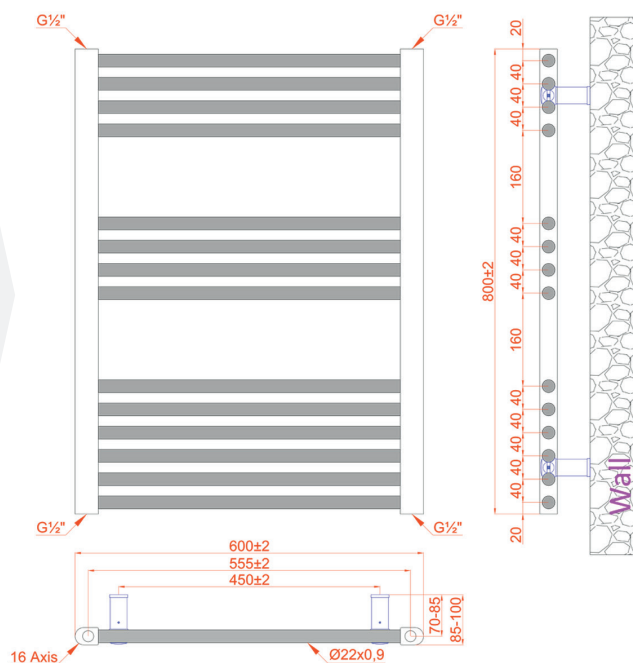


TECHNICAL DIAGRAMS

INDEPENDENT COLLECTION






1000x400MM
CONFIGURATION

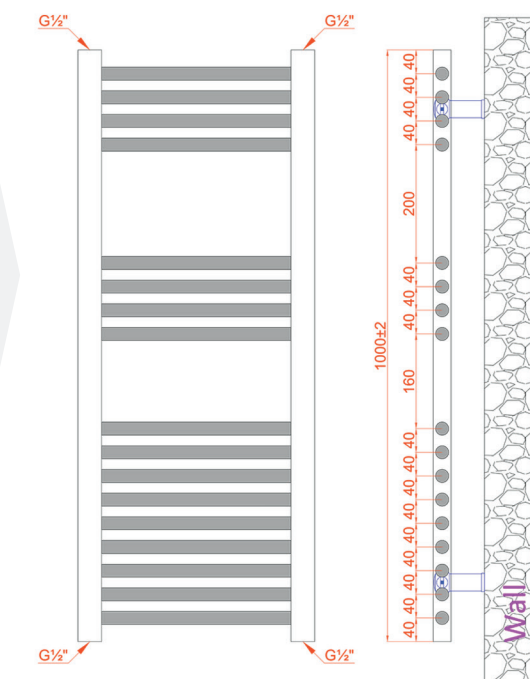

1000x500MM
CONFIGURATION

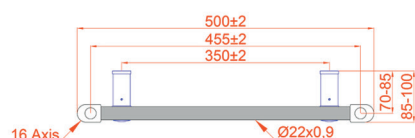



1000x600MM
CONFIGURATION

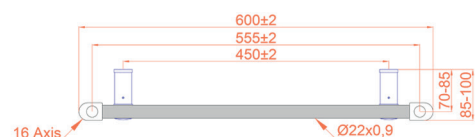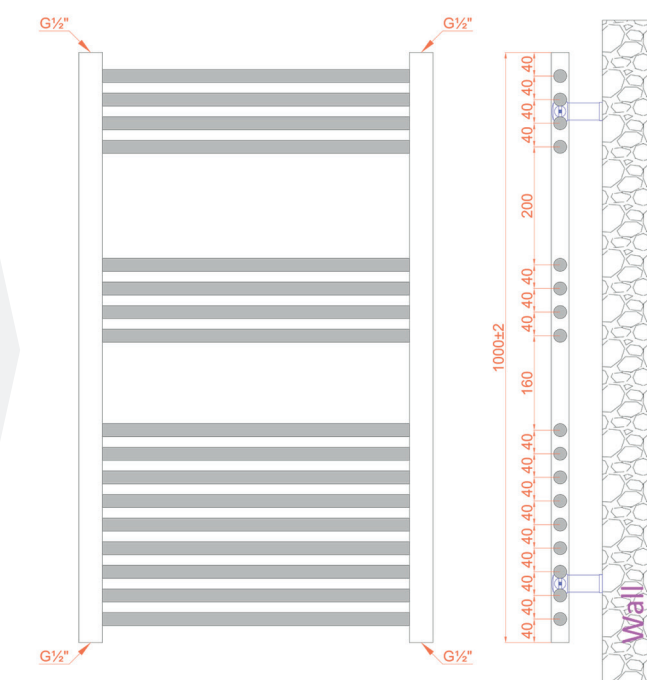


TECHNICAL DIAGRAMS

INDEPENDENT COLLECTION






1200x400MM
CONFIGURATION

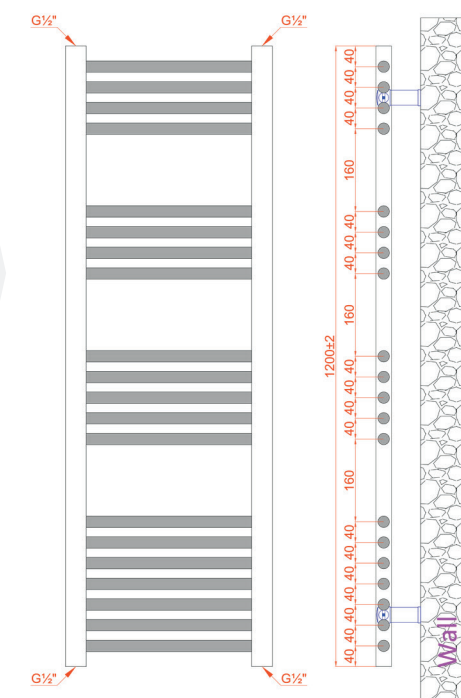

1200x500MM
CONFIGURATION

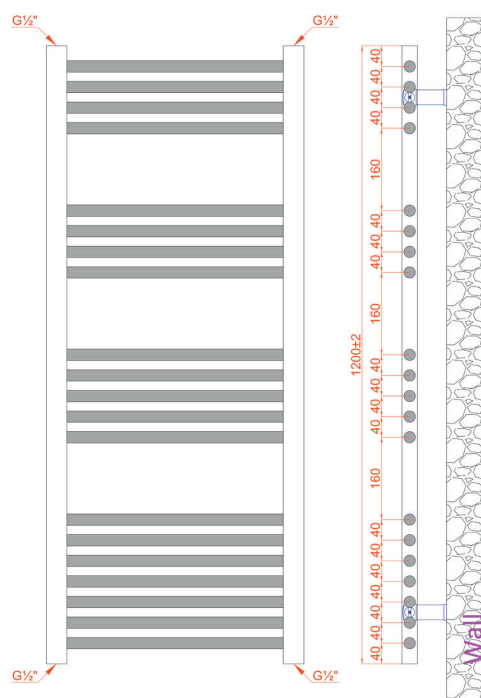


1200x600MM
CONFIGURATION

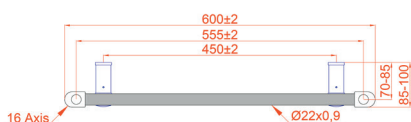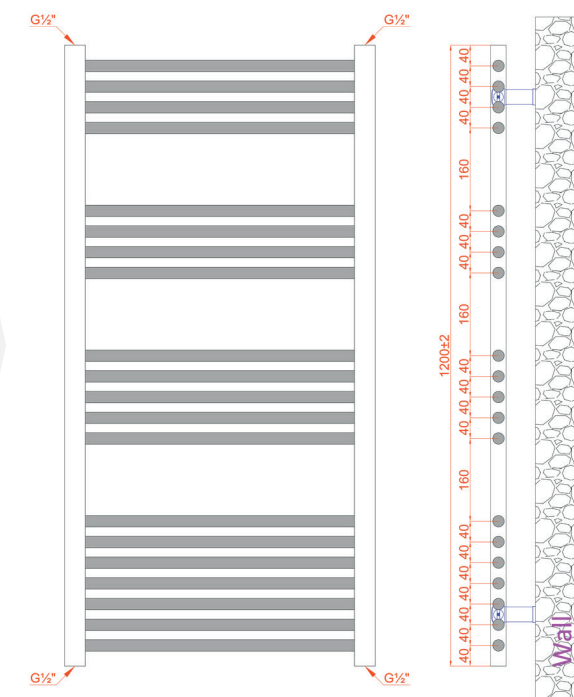


TECHNICAL DIAGRAMS

INDEPENDENT COLLECTION





1400x400MM
CONFIGURATION

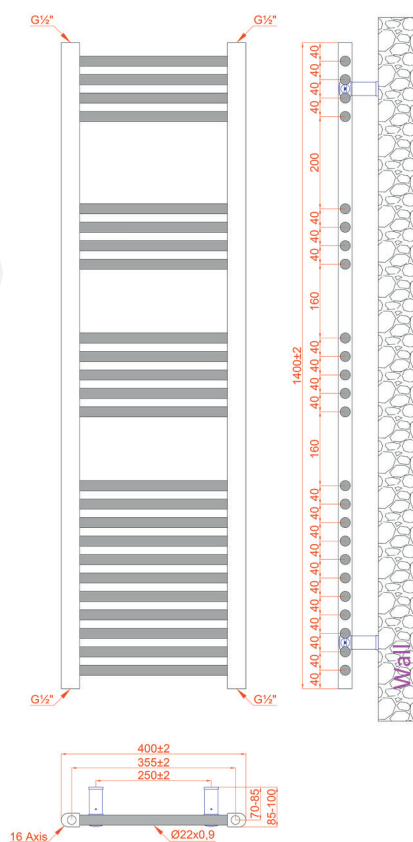

1400x500MM
CONFIGURATION

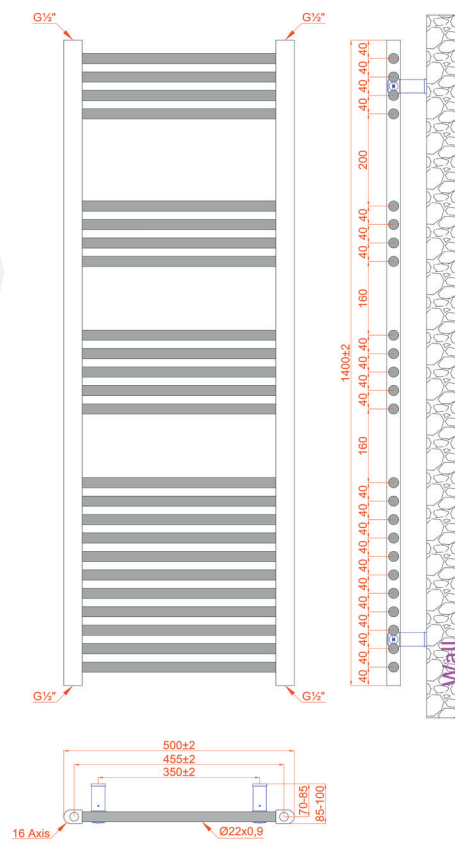


1400x600MM
CONFIGURATION

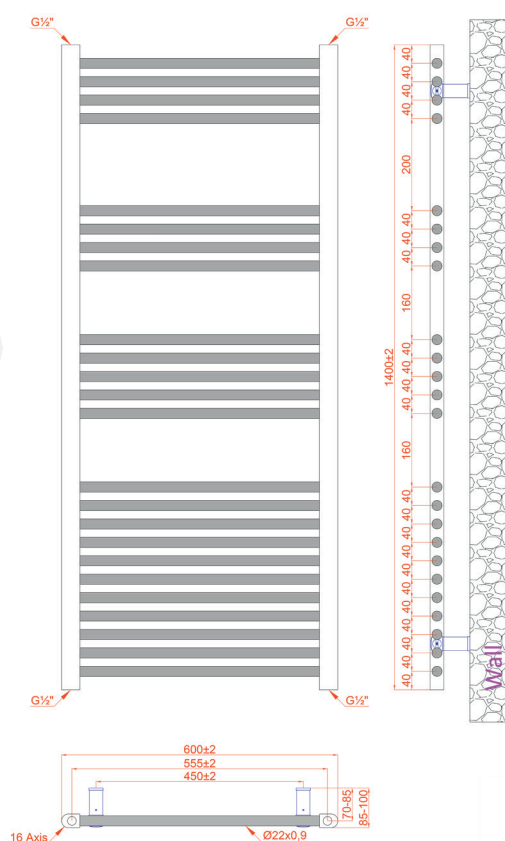


TECHNICAL DIAGRAMS

INDEPENDENT COLLECTION





1600x400MM
CONFIGURATION

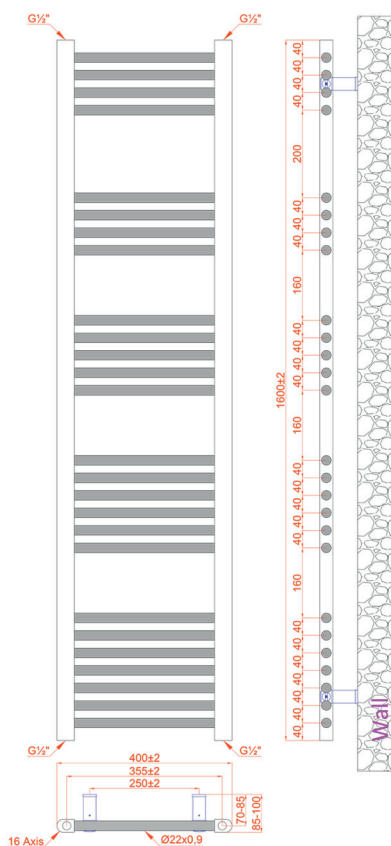

1600x500MM
CONFIGURATION

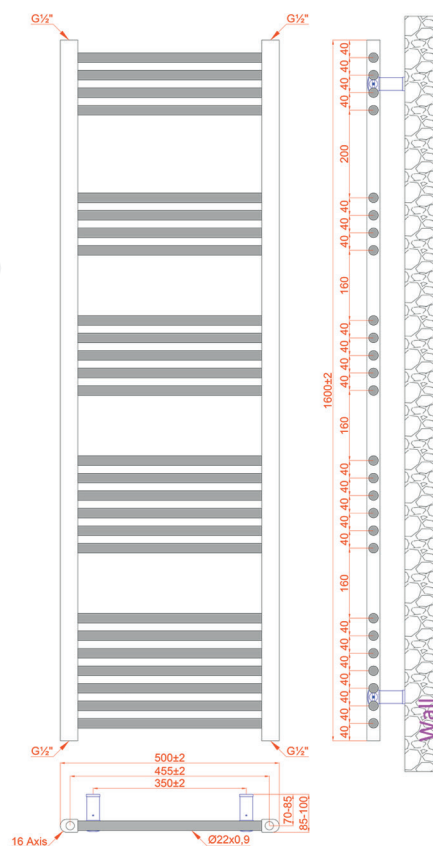


1600x600MM
CONFIGURATION

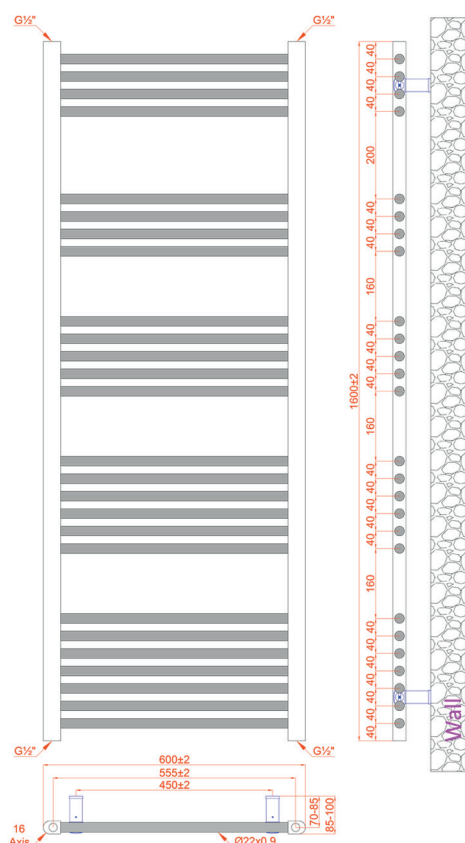


TECHNICAL DIAGRAMS

INDEPENDENT COLLECTION

1800x400MM
CONFIGURATION

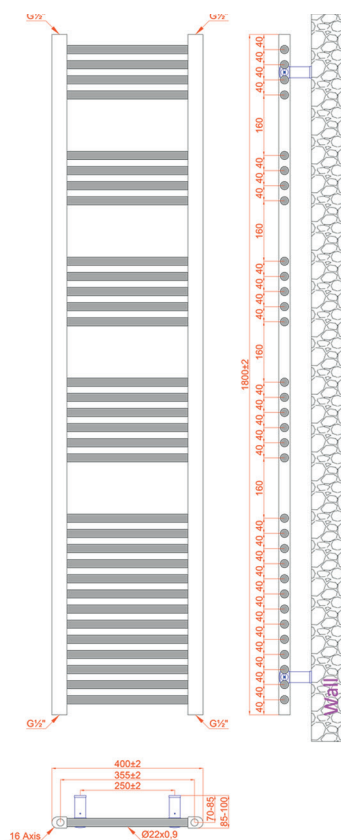

1800x500MM
CONFIGURATION

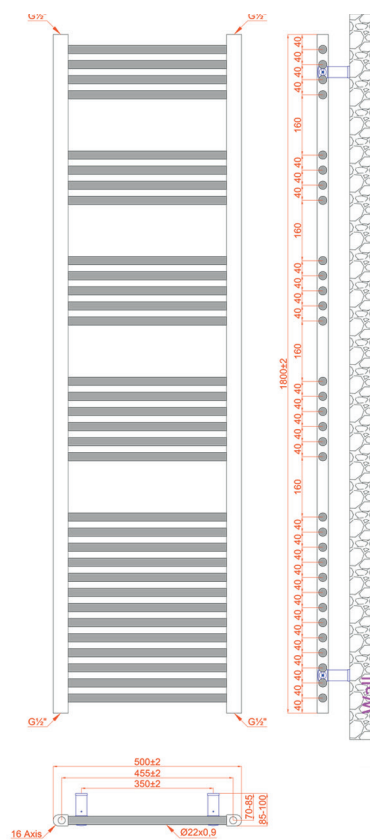

1800x600MM
CONFIGURATION

